


# панельные радиаторы

## Compact *mun 22*

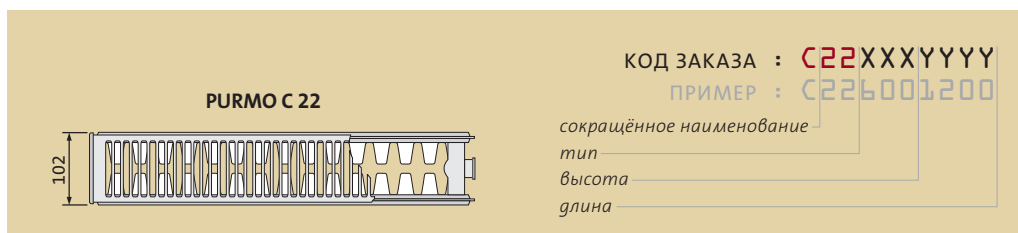

длина [мм]	параметры $t_z / t_p / t_i$	высота [мм]						
		300	400	450	500	550	600	900
400	<b>90/70/20 °C</b>	<b>484</b>	<b>616</b>	<b>680</b>	<b>743</b>	<b>805</b>	<b>865</b>	<b>1213</b>
	75/65/20 °C	384	488	539	588	636	684	955
500	<b>90/70/20 °C</b>	<b>605</b>	<b>770</b>	<b>850</b>	<b>929</b>	<b>1006</b>	<b>1081</b>	<b>1516</b>
	75/65/20 °C	481	611	674	735	796	855	1194
600	<b>90/70/20 °C</b>	<b>726</b>	<b>924</b>	<b>1020</b>	<b>1114</b>	<b>1207</b>	<b>1298</b>	<b>1820</b>
	75/65/20 °C	577	733	808	882	955	1025	1433
700	<b>90/70/20 °C</b>	<b>847</b>	<b>1078</b>	<b>1190</b>	<b>1300</b>	<b>1408</b>	<b>1514</b>	<b>2123</b>
	75/65/20 °C	673	855	943	1029	1114	1196	1672
800	<b>90/70/20 °C</b>	<b>968</b>	<b>1232</b>	<b>1361</b>	<b>1486</b>	<b>1610</b>	<b>1730</b>	<b>2426</b>
	75/65/20 °C	769	977	1078	1176	1273	1367	1910
900	<b>90/70/20 °C</b>	<b>1089</b>	<b>1386</b>	<b>1531</b>	<b>1672</b>	<b>1811</b>	<b>1947</b>	<b>2730</b>
	75/65/20 °C	865	1099	1212	1323	1432	1538	2149
1000	<b>90/70/20 °C</b>	<b>1211</b>	<b>1540</b>	<b>1701</b>	<b>1857</b>	<b>2012</b>	<b>2163</b>	<b>3033</b>
	75/65/20 °C	961	1221	1347	1470	1591	1709	2388
1100	<b>90/70/20 °C</b>	<b>1332</b>	<b>1694</b>	<b>1871</b>	<b>2043</b>	<b>2213</b>	<b>2379</b>	<b>3336</b>
	75/65/20 °C	1057	1343	1482	1617	1750	1880	2627
1200	<b>90/70/20 °C</b>	<b>1453</b>	<b>1849</b>	<b>2041</b>	<b>2229</b>	<b>2414</b>	<b>2595</b>	<b>3639</b>
	75/65/20 °C	1153	1465	1616	1764	1909	2051	2866
1400	<b>90/70/20 °C</b>	<b>1695</b>	<b>2157</b>	<b>2381</b>	<b>2600</b>	<b>2817</b>	<b>3028</b>	<b>4246</b>
	75/65/20 °C	1345	1709	1886	2058	2227	2393	3343
1600	<b>90/70/20 °C</b>	<b>1937</b>	<b>2465</b>	<b>2721</b>	<b>2972</b>	<b>3219</b>	<b>3460</b>	<b>4853</b>
	75/65/20 °C	1538	1954	2155	2352	2546	2734	3821
1800	<b>90/70/20 °C</b>	<b>2179</b>	<b>2773</b>	<b>3061</b>	<b>3343</b>	<b>3621</b>	<b>3893</b>	<b>5459</b>
	75/65/20 °C	1730	2198	2425	2646	2864	3076	4298
2000	<b>90/70/20 °C</b>	<b>2421</b>	<b>3081</b>	<b>3401</b>	<b>3715</b>	<b>4024</b>	<b>4326</b>	<b>6066</b>
	75/65/20 °C	1922	2442	2694	2940	3182	3418	4776
2300	<b>90/70/20 °C</b>	<b>2784</b>	<b>3543</b>	<b>3912</b>	<b>4272</b>	<b>4627</b>	<b>4974</b>	<b>6976</b>
	75/65/20 °C	2210	2808	3098	3381	3659	3931	5492
2600	<b>90/70/20 °C</b>	<b>3147</b>	<b>4005</b>	<b>4422</b>	<b>4829</b>	<b>5231</b>	<b>5623</b>	<b>7886</b>
	75/65/20 °C	2499	3175	3502	3822	4137	4443	6209
3000	<b>90/70/20 °C</b>	<b>3632</b>	<b>4621</b>	<b>5102</b>	<b>5572</b>	<b>6036</b>	<b>6488</b>	<b>9099</b>
	75/65/20 °C	2883	3663	4041	4410	4773	5127	7164

Тепловая мощность радиаторов (Вт) по норме EN 442 для параметров 90/70/20 °C и 75/65/20 °C.

[Вт/м] 105/75/20 °C показатель n	1469	1872	2068	2260	2450	2635	3707
	<b>1,3094</b>	<b>1,3182</b>	<b>1,3226</b>	<b>1,3270</b>	<b>1,3314</b>	<b>1,3358</b>	<b>1,3561</b>

типы радиаторов доступны на складе